

Mått

H: 311 mm

B: 50 mm

D: 23 mm

Vikt: 340g

Mikrobrytare:

- Liten tryckyta (61mm): 1st NO / NC
- Stor tryckyta (227mm): 1st NO

IP klass: IP67

Nominell märkström från:

12 V Resisitiv 6A

Induktiv L/R 5 ms 6A

24 V Resisitiv 6A

Induktiv L/R 5 ms 5A

Lägsta märkström 1mA/4 V DC



61
227

Material:


Alu.6060-T6

POM Plast (Acetalplast)

Rengöring:

Kontakten går att rengöra med alla förekommande rengöringsmedel.

Hålbildsritning:

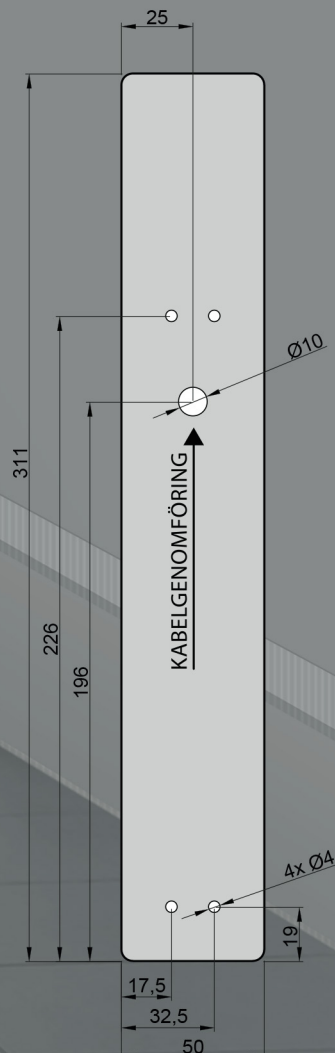

Tillval:

Går att beställa med:

* Radiostyrning

* Universiella symboler:

1. Dörrsymbol



2. Rullstolsymbol



3. Hissymbol



* Kontrastränder




OBS.

Vid utomhusmontage bör ett 3mm dräneringshål borras i den nedre gaveln på armbågskontakten för att dränera ut eventuell fukt.

Assembly and installation.

1. Disassemble the lower endcap by screwing out both screws.
2. Slide out the aluminum lid.
3. Connect the electric wiring (12-24 V) to the connection terminals.
4. Fixate the aluminum core with assembly screws and washers.
5. Assemble the lower end cap.
6. Place back the lid by setting its hinge on the core's C channel and turning it counterclockwise (see illustration).

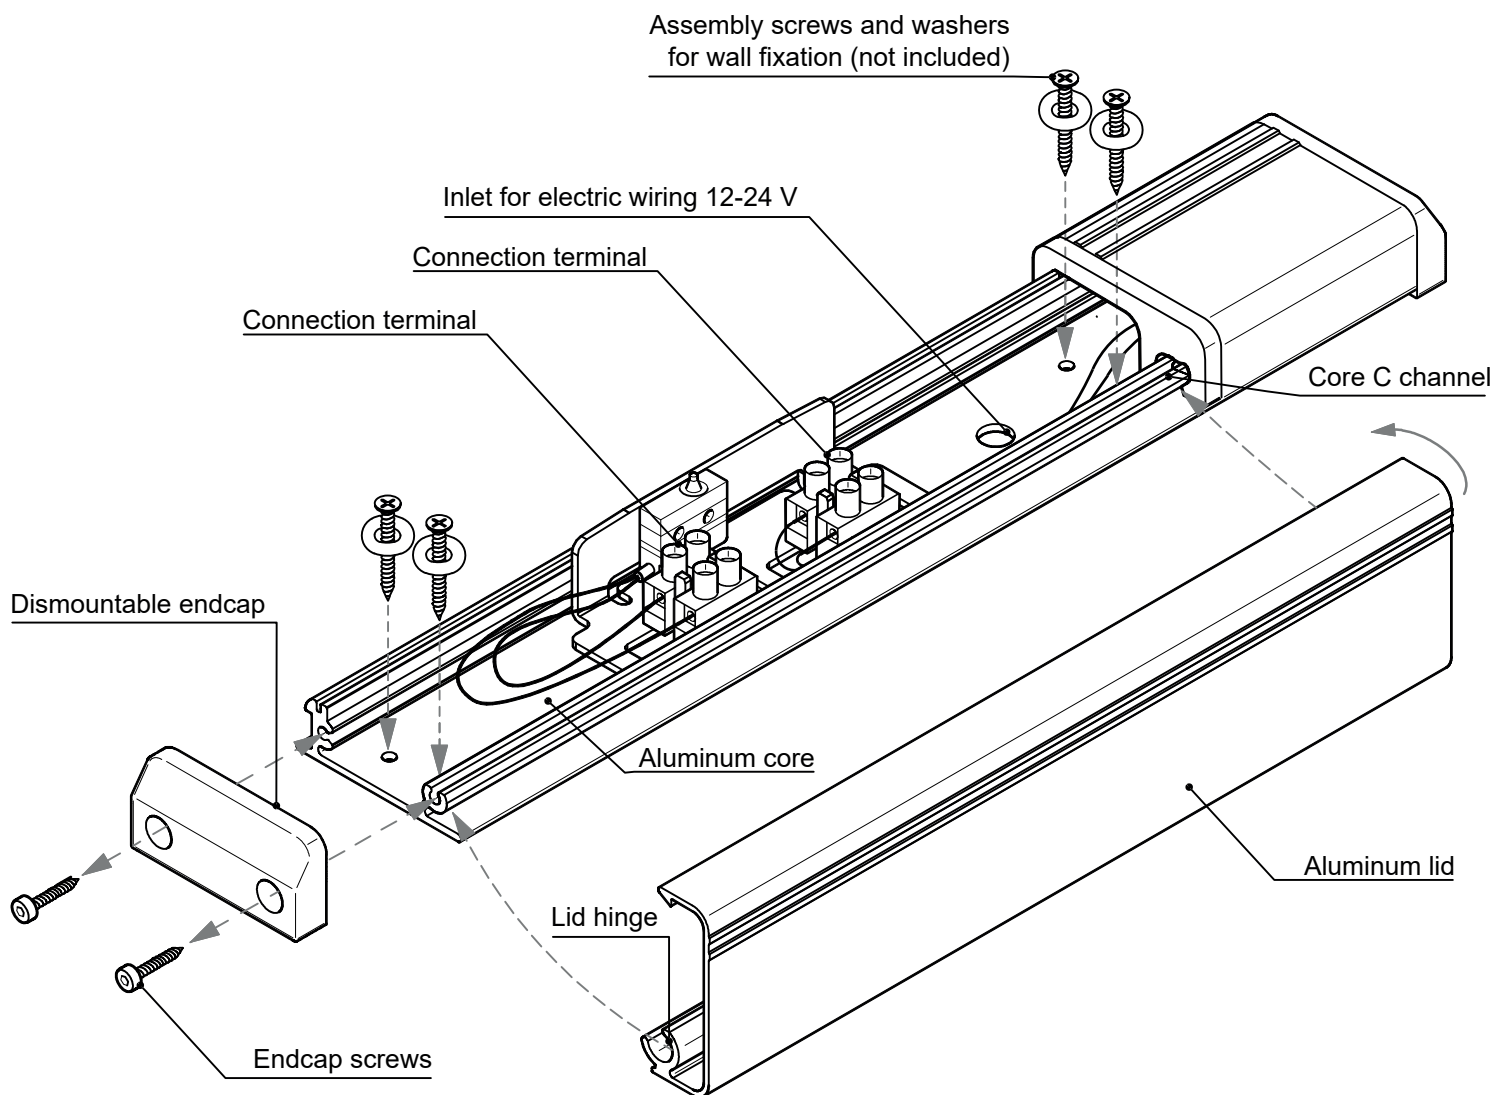

Click [here](#) to go to the product JCK 260.