

Mitat ja paino:

Korkeus: 250 mm Leveys: 95 mm Syvyys: 23 mm Paino: 320 g

Mikrokytkin, 1 kpl. NO

IP-Luokka: IP67

Nimellisestä nimellisvirrasta:

12 V Resistiivinen 6A

Induktiivinen L/R 5 ms 6A

24 V Resistiivinen 6A

Induktiivinen L/R 5 ms 5A

Pienin nimellisvirta 1mA/4 V DC



Materiaali
ABS-muovi
Painikkeet ruostuma


Painikkeet ruostumattomasta

teräksestä

Puhdistus:

Kytkintä voidaan puhdistaa kaupallisesti saatavilla olevilla puhdistusaineilla.

Reikäkuva:

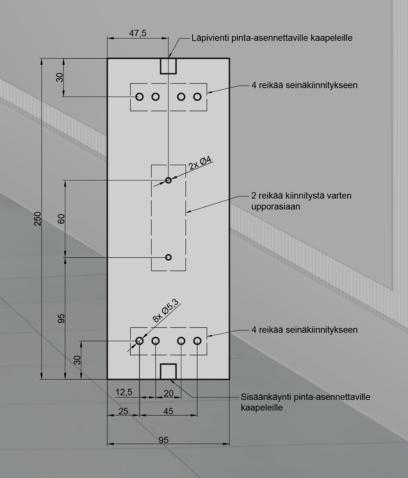

Valinnainen varustus:

Voidaan tilata seuraavilla varusteilla:

- * 2 Mikrokytkin
- * NO/NC Mikrokytkin
- * Radiohallinta
- * Ohjausyksikkö, jossa on 2 lähtöä

Installation instructions JCK 110



Assembly and installation.

- Press the plastic lid so that the dismountable the holes are visible.
- 2. By having the lid pressed insert the tip of a flat screwdriver in the dismountable holes and drag upwards.
- Remove the lid. 3.
- Remove the cable screws.
- Connect the electric wiring (12 24V) and place back the cable screws.
- 6. Fixate the plastic core with screws and washers (not included).

